


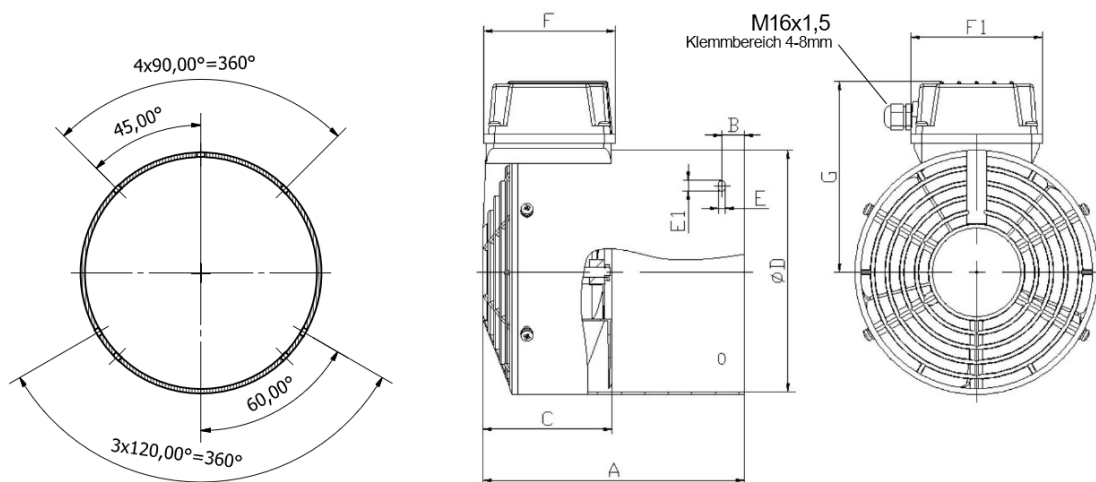

A	B	C	D	E	E1	F	F1	G	m[kg]
160	6	95	137	5,5	8	96	105	125	3,35

CE		IP66	CLASS:F				TYPE: FBC71				No:				
		S1													
		50Hz							60Hz						
		U[V]	I[A] max	P[W] max	n[min^{-1}] max	p[Pa]	LpA[dB]	Q[m ³ /h]	U[V]	I[A] max	P[W] max	n[min^{-1}] max	p[Pa]	LpA[dB]	Q[m ³ /h]
μF	1~1	230-277	0.105	25	2950				220-277	0.12	30	3550			
3-Δ		200-303	0.14	30	2950	50	62	52	220-332	0.11	28	3550			
3-Y		346-525	0.08	30	2950	50	62	52	380-575	0.065	28	3550	60	71	63

Designed by	Checked by	Approved by	Date	Date	
				23.05.2018	
1LA707; 1LE1001-0C Y3-71; AM71			FBC71		
Fremdbelüftung_FBC71			Edition	Sheet 1 / 1	