

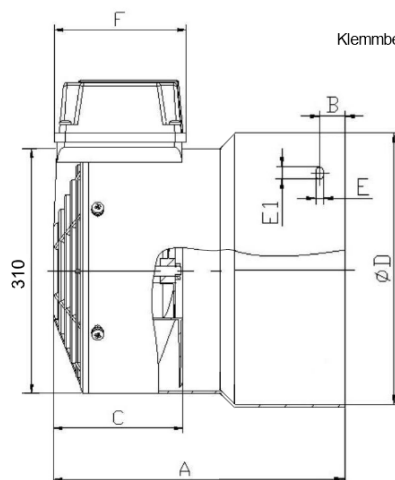


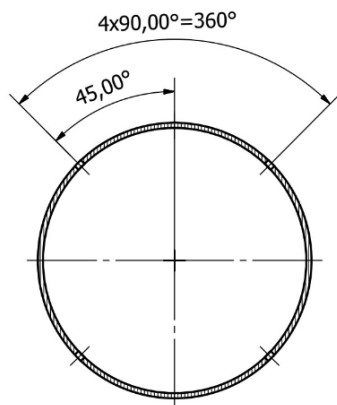

M16x1,5
Klemmbereich 4-8mm

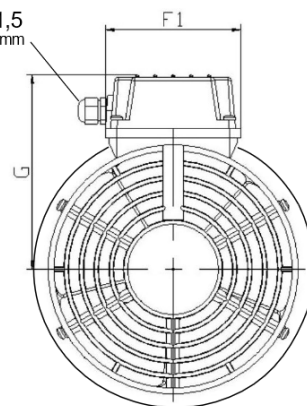

A	B	C	D	E	E1	F	F1	G	m[kg]
360	35	151	350	8	15	105	105	210	16,52

CE		IP66	CLASS:F				TYPE:FBC180				No:				
		S1													
		50Hz							60Hz						
		U[V]	I[A] max	P[W] max	n[min^{-1}] max	p[Pa]	LpA[dB]	Q[m ³ /h]	U[V]	I[A] max	P[W] max	n[min^{-1}] max	p[Pa]	LpA[dB]	Q[m ³ /h]
μF	1-L	230-277	0,64	73	1450				220-277	0,57	88	1750			
	3-Δ	200-303	0,88	98	1450	55	72	686	220-332	0,66	117	1750			
	3-Y	346-525	0,46	98	1450	55	72	686	380-575	0,35	117	1750	66	85	828

Designed by	Checked by	Approved by	Date	Date	
				23.05.2018	
Y2-180; Y2HE-180; Y2PE180			FBC180		
			Fremdbelüftung_FBC180		
			Edition	Sheet	
				1 / 1	