


Typ	výkon		otáčky 1/min	Prúd A	Účinnosť cos	Rozbehový prúd		Mr		Parametre kondenzátora práce	Parametre kondenzátora rozbehu	Hlučnost LwA dB	Váha kg
	kw	Hp				-	A	-	Mm				
ML 63 1-2	0.18	0.25	2750	1.31	65	0.92	8	1.7	2.5	8 µF / 450 V	40 µF / 250 V	70	4.2
ML 63 2-2	0.25	0.37	2760	1.76	67	0.92	10	1.7	2.5	10 µF / 450 V	50 µF / 250 V	73	4.7
ML 71 1-2	0.37	0.50	2780	2.42	70	0.95	15	1.7	2.5	12 µF / 450 V	75 µF / 250 V	75	5.3
ML 71 2-2	0.55	0.75	2790	3.45	73	0.95	20	1.7	2.5	16 µF / 450 V	100 µF / 250 V	76	7.4
ML 80 1-2	0.75	1.0	2800	4.54	74	0.97	30	1.7	2.5	20 µF / 450 V	100 µF / 250 V	76	9.5
ML 80 2-2	1.1	1.5	2810	6.45	76	0.97	40	1.7	2.5	25 µF / 450 V	150 µF / 250 V	79	11.2
ML 90S-2	1.5	2.0	2810	8.62	78	0.97	55	1.8	2.5	40 µF / 450 V	150 µF / 250 V	84	14
ML 90L-2	2.2	3.0	2810	12.5	79	0.97	75	1.8	2.2	50 µF / 450 V	250 µF / 250 V	84	17
ML 100L-2	3.0	4.0	2830	16.6	80	0.98	95	2.0	2.2	60 µF / 450 V	400 µF / 300 V	88	25
ML112M-2	3.7	5.0	2850	20.5	80	0.98	120	2.0	2.0	60 µF / 450 V	500 µF / 300 V	90	30.5

ML 63 1-4	0.12	0.16	1350	1.04	55	0.91	6	1.6	2.5	10 µF / 450 V	40 µF / 250 V	64	4
ML 63 2-4	0.18	0.25	1360	1.54	56	0.91	8.5	1.6	2.5	12 µF / 450 V	40 µF / 250 V	64	4.8
ML 71 1-4	0.25	0.37	1380	1.94	61	0.92	10	1.6	2.5	14 µF / 450 V	50 µF / 250 V	66	5.9
ML 71 2-4	0.37	0.50	1380	2.8	62.5	0.92	15	1.5	2.5	16 µF / 450 V	75 µF / 250 V	68	6.9
ML 80 1-4	0.55	0.75	1400	3.8	67	0.94	20	1.7	2.5	20 µF / 450 V	100 µF / 250 V	71	9.6
ML 80 2-4	0.75	1.0	1410	4.75	73	0.94	30	1.7	2.5	25 µF / 450 V	150 µF / 250 V	71	10.8
ML 90S-4	1.1	1.5	1410	6.76	74.5	0.95	40	1.8	2.2	30 µF / 450 V	150 µF / 250 V	74	13.5
ML 90L-4	1.5	2.0	1420	9.03	76	0.95	55	1.8	2.2	40 µF / 450 V	200 µF / 250 V	79	16.5
ML 100L1-4	2.2	3.0	1430	12.6	78	0.97	75	1.8	2.2	50 µF / 450 V	300 µF / 250 V	79	24
ML100L2-4	3	4.0	1440	17.0	79	0.97	95	1.8	2.2	60 µF / 450 V	400 µF / 250 V	83	30
ML112M-4	3.7	5.0	1440	20.7	80	0.97	120	2.0	2.0	60 µF / 450 V	500 µF / 250 V	86	36

Montážní a celkové rozměry

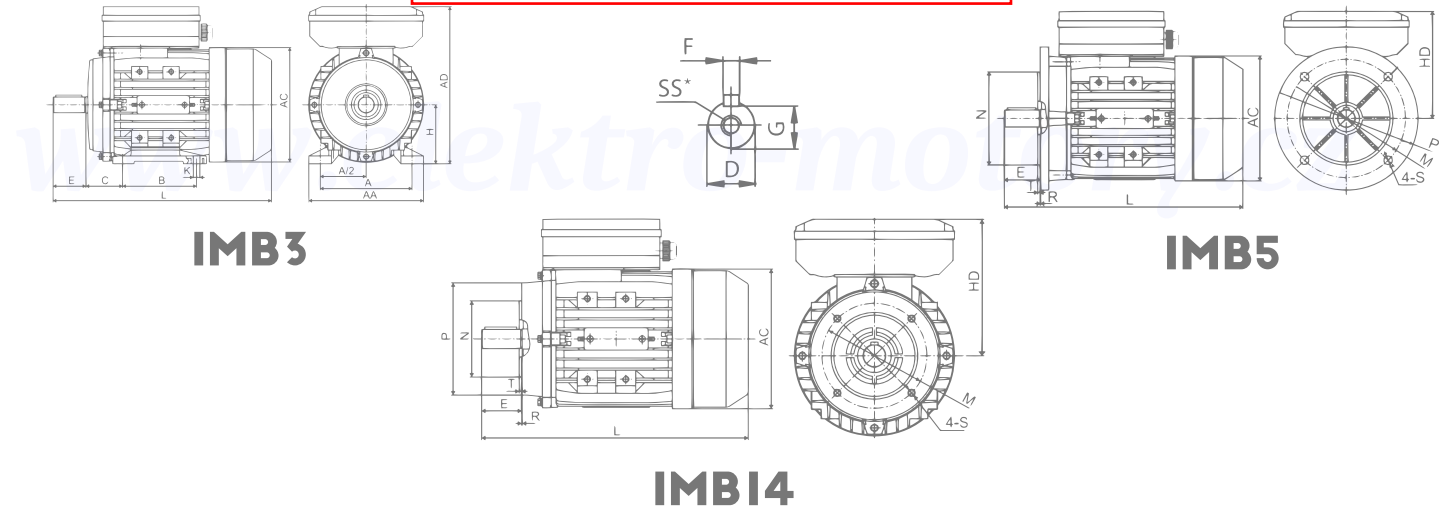

TYP	Montážne rozmery																Celkové rozmery									
	B3						B5						B14													
	A	B	C	D	E	F	G	H	K	M	N	P	R	S	T	M	N	P	R	S	T	AA	AC	AD	HD	L
63	100	80	40	11	23	4	8.5	63	7	115	95	140	0	10	3.0	75	60	90	0	M5	2.5	120	130	179	116	212
71	112	90	45	14	30	5	11	71	7	130	110	160	0	10	3.5	85	70	105	0	M6	2.5	132	145	194	123	255
80	125	100	50	19	40	6	15.5	80	10	165	130	200	0	12	3.5	100	80	120	0	M6	3.0	157	165	223	143	290
90S	140	100	56	24	50	8	20	90	10	165	130	200	0	12	3.5	115	95	140	0	M8	3.0	172	185	240	150	335
90L	140	125	56	24	50	8	20	90	10	165	130	200	0	12	3.5	115	95	140	0	M80	3.0	172	185	240	150	365
100L	160	140	63	28	60	8	24	100	12	215	180	250	0	15	4.0	130	110	160	0	M8	3.5	196	205	260	160	445
112M	190	140	70	28	60	8	24	112	12	215	180	250	0	15	4.0	130	110	160	0	M8	3.5	222	230	295	183	453