

MILLIMETER
[INCH]


NOTES:

1. LEADS: 18GA STRANDED. LEADS CAN BE ANY COLOR EXCEPT GREEN OR GREEN WITH YELLOW STRIPE.
2. GROUNDING OR EARTHING PROVISIONS: USE HOLES AS INDICATED FOR GROUNDING OR EARTHING. REFER TO APPROPRIATE LISTING OR REGULATORY AGENCY FOR PROPER METHOD OF GROUNDING OR EARTHING.
3. RECOMMENDED SCREW SIZE 10-16 TYPE BT OR 25 THREAD CUTTING SCREW. MAXIMUM PENETRATION [17.40]/.686.
4. MOTOR IDENTIFICATION: MANUFACTURER'S NAME, MODEL NUMBER, VOLTAGE, FREQUENCY, INSPECTOR'S CODE WITH "FF" SUFFIX, DATE OF MANUFACTURE, AGENCY RECOGNITION CODE, PLANT LOCATION CODE AND COUNTRY OF ORIGIN
5. MOUNTING MUST NOT RESTRICT THIS DIAMETER.

(4X) $\frac{\phi 4.343}{\phi .171} \times \frac{17.27}{[.68]}$ MIN. DEEP HOLES
EQUALLY SPACED AS SHOWN
ON A $\phi 117.475$ BOLT CIRCLE
BASIC (SEE NOTE 2)
 $\phi 0.64/.025$ (M) X

(2X) $\frac{\phi 4.343}{\phi .171} \times \frac{10.50}{[.41]}$ MIN. DEEP HOLES
EQUALLY SPACED AS SHOWN
ON A $\phi 76.20$ BOLT CIRCLE BASIC
(SEE NOTE 2) $\phi 1.27/.050$ (M) X

MOUNTING MUST NOT
RESTRICT THIS ϕ

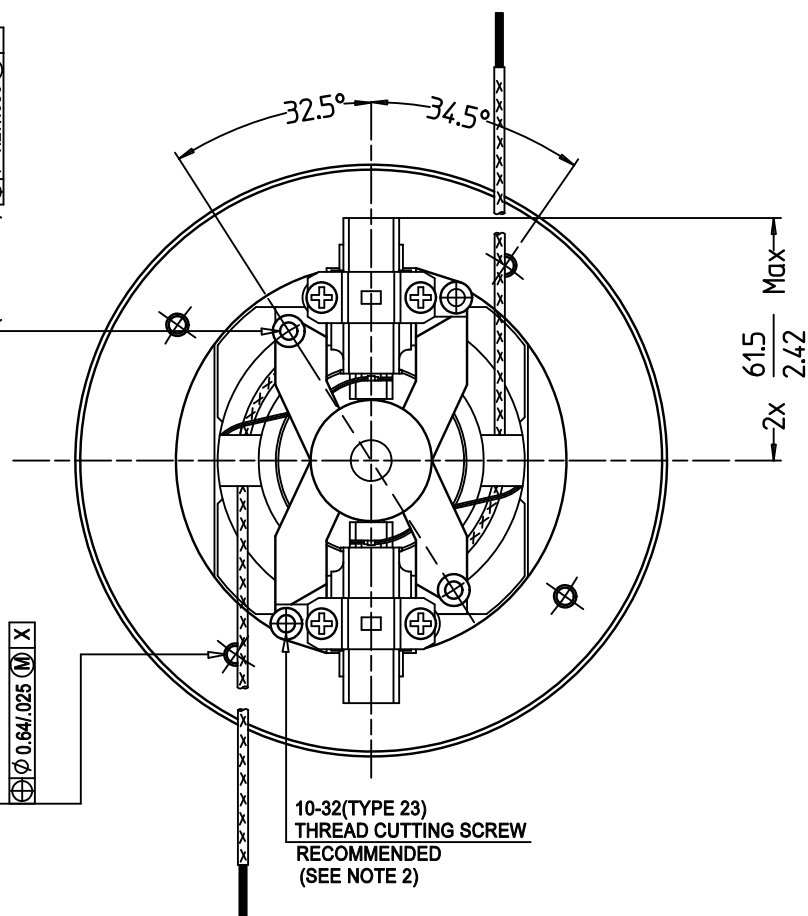

116310-01

MPE® **AMETEK**®
ADVANCED MOTION SOLUTIONS

Denominazione
Title **DIMENSIONI DI INGOMBRO**
OVERALL DIMENSIONS
TF BlowerUniversal
240VAC 1 900W 145mm

Data	Firma
Date 21/06/2011	Sign
Old Part Number	065300008
New Part Number	6210960040